



No. 14 [14-A] Rotodrapeer®

1 - 4-1/2 lbs.

Used with 1400 and 4200 track. Brackets formed of 11 gauge steel. Can support 75 lbs. maximum weight. Two Pipe Clamps supplied (clamps for 1" pipe standard). Two No. 400-C Clamps provided for connecting towlines.





No. 28-A [17-A, 14-A, 6-A] Rotodrapeer®

1 - 5-1/2 lbs.

Used with 2800 track channel. Essentially same as Model 28 except includes ball-type locking device which provides precise 15 degree settings of rotation. Models 17-A, 14-A and 6-A correspond with Models 17, 14, and 6, respectively. Two pipe clamps supplied (clamps for 1" pipe standard). Two No. 400-C clamps provided for connecting towlines.



Safety End Stops are included with all track type Rotodrapers® and MUST be used.

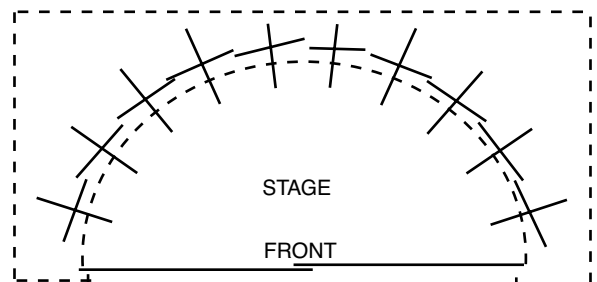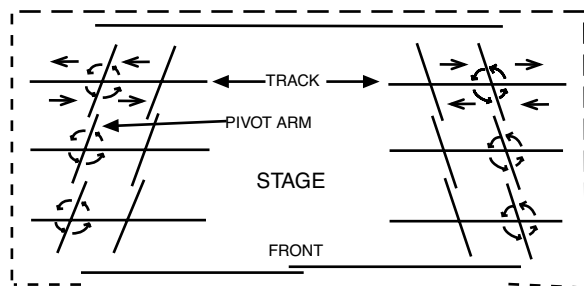

Typical Rotodrapeer® Applications